

# MA


## Series

### MA Applications

- Theater, night clubs, and houses of worship
- Stage monitor side fill and night clubs
- Can be used as a stand alone system
- Houses of worship, medium to large theatres
- All purpose, compact, flyable subwoofer
- Larger club performance
- Larger scale installs

### MA-12


The MA-12 is a 2-way full range loudspeaker system. Includes a 12inch LF driver and a 2inch compression driver. The MA series provides a completed set of sound reinforcement instrument to satisfy the highest demands of audio professionals for both fixed installation and rental markets. The MA series delivers an ultimate sonic performance in a compact and multi-purpose package. Setting up MA enclosures is quick and easy due to the unique integrated flying hardware system which ensures precision, safety and full compatibility with current rigging safety standards. Its compact and wedge-shaped format makes MA series equally suitable to sound reinforcement applications such as front of house, floor monitor and distributed systems.

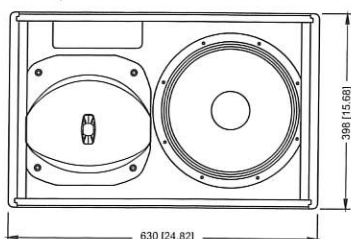

**MA-12**  
Full Range

### MA-12E Constructed with European made Drivers

The MA-12E is a 2-way full range loudspeaker system. Includes a 12inch LF driver and a 2inch compression driver. The MA series provides a completed set of sound reinforcement instrument to satisfy the highest demands of audio professionals for both fixed installation and rental markets. The MA series delivers an ultimate sonic performance in a compact and multi-purpose package. Setting up MA enclosures is quick and easy due to the unique integrated flying hardware system which ensures precision, safety and full compatibility with current rigging safety standards. Its compact and wedge-shaped format makes MA series equally suitable to sound reinforcement applications such as front of house, floor monitor and distributed systems.



**MA-12E**  
Full Range

### MA Series

Model:	MA-12	MA-12E
System Power Rating	400w AES, 1600w Peak	400w AES, 1600w Peak
Frequency Range(±3dB)	65Hz-20KHz	65Hz-20KHz
Impedance	8ohm	8ohm
Sound Pressure Level(1w/1m)/max.cont.	98dB/134dB SPL	99dB/136dB SPL
Coverage	80°to 60°ver, 90° hor	80°to 60°ver, 90° hor
Transducers LF	12inch LF Drivers	12inch LF Drivers
M/HF	2inch HF Compression Driver	2inch HF Compression Driver
Dimensions wxhxd(inch)	15.68x24.82x14.04	15.68x24.82x14.04
wxhxd(millimetre)	398x630x356	398x630x356
Weight(Kg)	20	20
Connectors	2 x Neutrik NL4 Speakon	2 x Neutrik NL4 Speakon

Specifications