


Theatre LED Flood

CYC-200/CYC-200FC

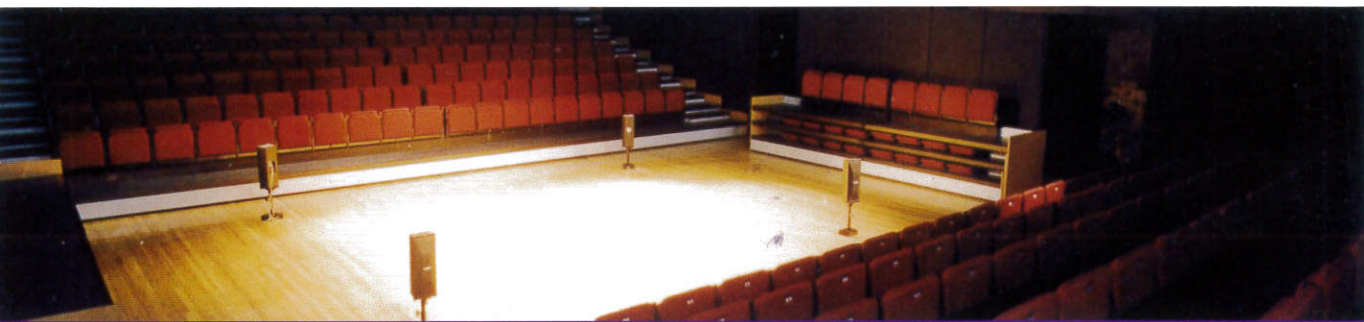

Specifications

Light Source: 1x150W cool/warm white LED
1x150W RGBW LED

Color Temperature: 3150±150K (WW)
5600±200K (CW)
2800~6000K (RGBW)

Beam Angle: 90° x113°

Control

DMX Channel: 3 channel (white)
4/9 channel (RGBW)

Control Mode: DMX, Master/Slave

Firmware Upgrade: Update via DMX link

Construction


Display: LCD display

Data In/Out Socket: 5-pin XLR socket


Power socket: Powercon

Protection Rating: IP20

Photometrics Diagram(CYC-200FC)

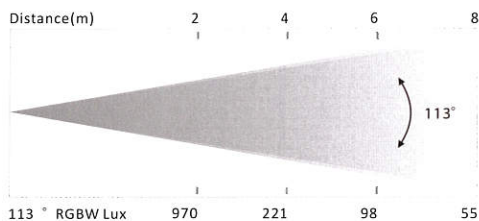

Dimension(mm)

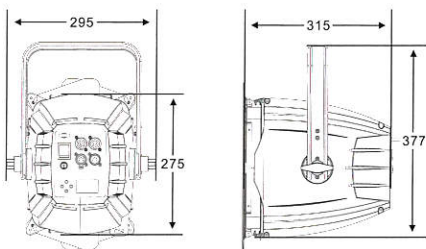

Electrical and Physical

Power Voltage: AC 100V~240V, 50/60Hz

Power Consumption: 180W (white)

155W (RGBW)

Dimension: 315x295x377mm (white/RGBW)

Weight: 5Kgs (white)

6.2Kgs (RGBW)

Optical

CRI: WW≥92, CW≥90

CQS: 93(WW), 90(CW)

TLCI: WW≥96, CW≥96

Features

Can be used to render the back ground of wall, ceiling and ground

4 dimming curves (linear, square rate, S-curve, anti-square rate)

0~100% smooth dimming

Various strobe speeds



CYC-200

CYC-200 FC