

PASODOBLE™

PAR 12

FEATURES

- Outstanding color mixing effect
- Compact design, small size
- Smooth dimming from 0-100%
- The toolless buckle is designed for multiple units jointed in the horizontal or vertical setup.
- Optional diffusion film (Filed angle 55°)

TECHNICAL SPECIFICATIONS

Specifications

- Light Source:12 x 8W RGBW LED
- Beam Angle:14°
- Field Angle: 25°/55°
- Total lumen output up to 2815lm (25°)/1898lm(55°)

Control

- DMX channel:10/8/5/4 channel
- Protocols:DMX512, RDM
- Firmware Upgrade via DMX link

Construction

- Display:OLED display
- Data In/Out:3-pin XLR
- Power In/Out:Power Connector in/out
- Protection Rating:IP20


Electrical and Physical

- Input Voltage Range:AC100-240V, 50/60Hz
- Power Consumption:85W
- Dimensions:239 x 257 x 88mm (9.4" x 10.1" x 3.5")
- Carton Dimension:640 x 330 x 450mm (25.2" x 13.0" x 17.7")
- Weight:3 kg (6.6 lbs)

22.3 kg (49.2 lbs)( Six-pack per carton )




PHOTOMETRICS DIAGRAM

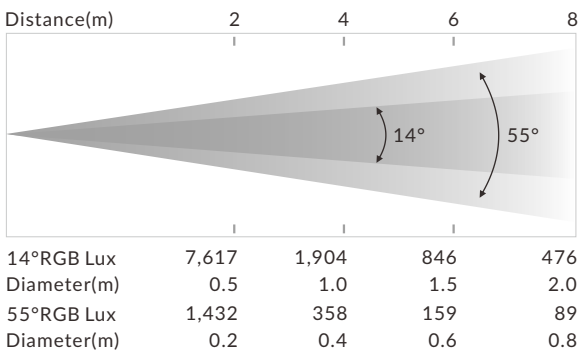


LIGHT QUALITY PARAMETER

CIE1931 CHROMATICITY COORDINATES

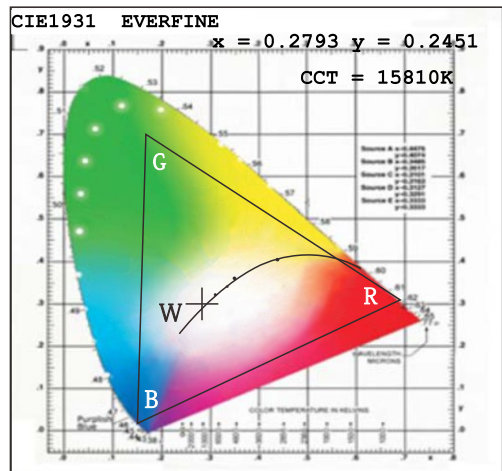

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

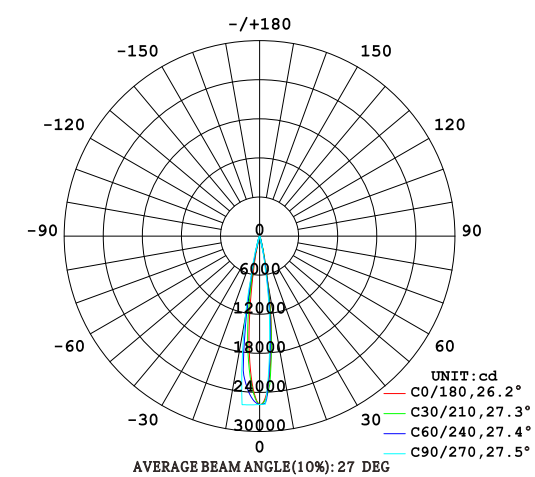

DIMENSIONS mm (in.)

