

UHF DUAL CHANNEL SYSTEM

KST-5U

HANDHELD TRANSMITTER SPECIFICATIONS

RF Frequency Range:460-970MHz
 RF Output: >10dBm
 Modulation Type:FM
 Max Deviation: ± 40KHz
 Spurious Emission: >55dBc
 Nominal Current Drain: <40mA
 Power Requirements:9V DC
 Dimensions:23x5x5cm

KLT-8U

BODYPACK TRANSMITTER SPECIFICATIONS


RF Frequency Range:460-970MHz
 RF Output:>10dBm
 Modulation Type:FM
 Max Deviation:± 40KHz
 Spurious Emission:>53dBc
 Nominal Current Drain:<40mA
 Power Requirements:9V DC
 Dimensions:10.5x6.5x2.5cm



! KST-5U
HANDHELD TRANSMITTER



! KLT-8U
BODYPACK TRANSMITTER



Top View

KRU-302 SERIES>>>

PROFESSIONAL WIRELESS MICROPHONE SYSTEM

SYSTEM FEATURES

- ※ UHF 800MHz operation frequency
- ※ Dual channel operation
- ※ Extreme low THD and super fidelity
- ※ Switch impact noise defeat circuit
- ※ Double squelch operation circuit, higher efficient and much more steady.
- ※ Balanced XLR and unbalanced 1/4" outputs.


KRU-302

RECEIVER SPECIFICATIONS

RF Frequency Range:460-970MHz
 Receiving Sensitivity:-105dBm(S/N:-12dB 25KHz)
 Image & Spurious Rejection:>70dB
 Signal/Noise Ratio:>85dB
 Border Upon Channel Rejection:>70dB
 T.H.D.:<0.5%
 Audio Output Level:0-±300mV
 Power Requirements:12-18V DC nominal 300mA
 Dimensions:21.3x15x4.3cm



! KRU-302
DUAL CHANNEL RECEIVER

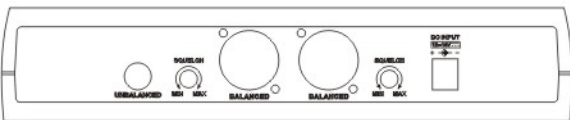

Rear Panel

HANDHELD	LAVALIER	HEADWORN	GUITAR/BASS	DUAL CHANNEL COMBO
Receiver:KRU-302 Handheld Mic:KST-5U	Receiver:KRU-302 Bodypack Transmitter:KLT-8U Lavalier Mic:LT-4A	Receiver:KRU-302 Bodypack Transmitter:KLT-8U Headworn Mic: HT-2	Receiver:KRU-302 Bodypack Transmitter:KLT-8U Guitar Cable:G-05	<div> Receiver:KRU-302 Handheld Mic:KST-5U Bodypack Transmitter:KLT-8U </div> <div> Lavalier Mic:LT-4A Headworn Mic: HT-2 Guitar Cable:G-05 </div>